





MIXY - THE RATIONAL

FACTS

Type: Mixy plastering machine
Use: Renovation, small and large construction sites
Innovation: Single phase operation, 2.2 – 3.0 kW

FEATURES

- For interior and exterior works
- Processing glue, ridge plaster, flowing screed, indoor and outdoor plaster
- Light weight, easy to assemble and dismount
- High quality components
- Single phase operation with condenser (230 V – 2.2 kW) or frequency inverter (230 V – 3.0 kW)
- Frequency inverter for more power in single phase mode
- Frame fitted with 4 wheels for increased flexibility




Booster pump
(standard)



Protective cover



Easily accessible
water armature

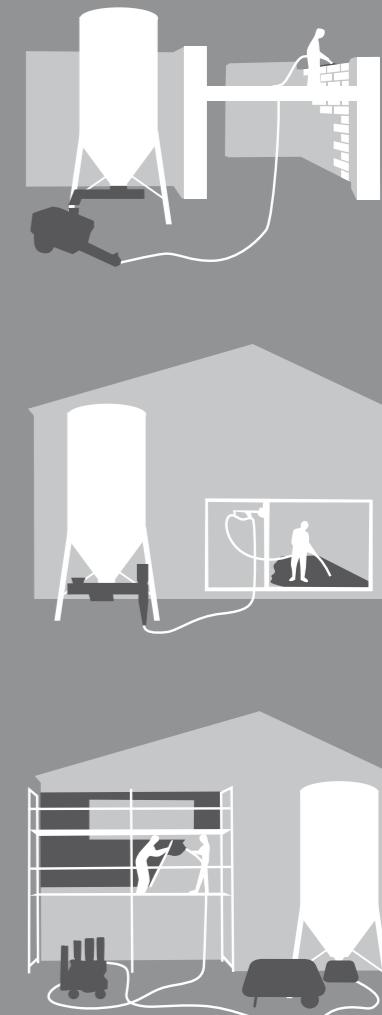

TECHNICAL DATA

Mixing capacity*	approx. 16 l/min
Max. range*	approx. 10 m
Gear motor Mixy	230V 2,2kW 50Hz
Gear motor Mixy FU	230V 3,0kW 50Hz
Compressor capacity	180 l/min
Transport pressure	approx. 15 bar
Min. water pressure	3 bar
Electrical drive	24 V

MEASURE + WEIGHT

Length	1640 mm
Width	600 mm
Max. height	1190 mm
Height of opening	1010 mm
Total weight	202 kg

MACHINERY

Pump:	D4-ECO
Mortar hose	DN 25, 10 m, 40 bar
Air hose 1/2"	10 m
Spray gun	DN 25
Toolset	

* Approximate values that may vary according to type and consistency of the material used